

Specifications

SMART Room System™ for Microsoft® Lync® for large rooms

Model SRS-LYNC-L

Overview


The SMART Room System™ for Microsoft® Lync® for large rooms features two SMART Board® 8070i-G4 interactive flat panels, a tabletop console, a high-definition camera, table microphones and speakers.

Using the installed Lync Room System software, you can start a meeting and connect with other individuals or meeting rooms with a single tap on the console or one of the interactive flat panels. You can write or draw on an interactive flat panel using the whiteboard feature, present a Microsoft PowerPoint® slide show, connect a laptop to share its screen and share your content with connected individuals and meeting rooms in real time.

See smarttech.com/smartroom for more information on this product.



Dimensions and weights¹

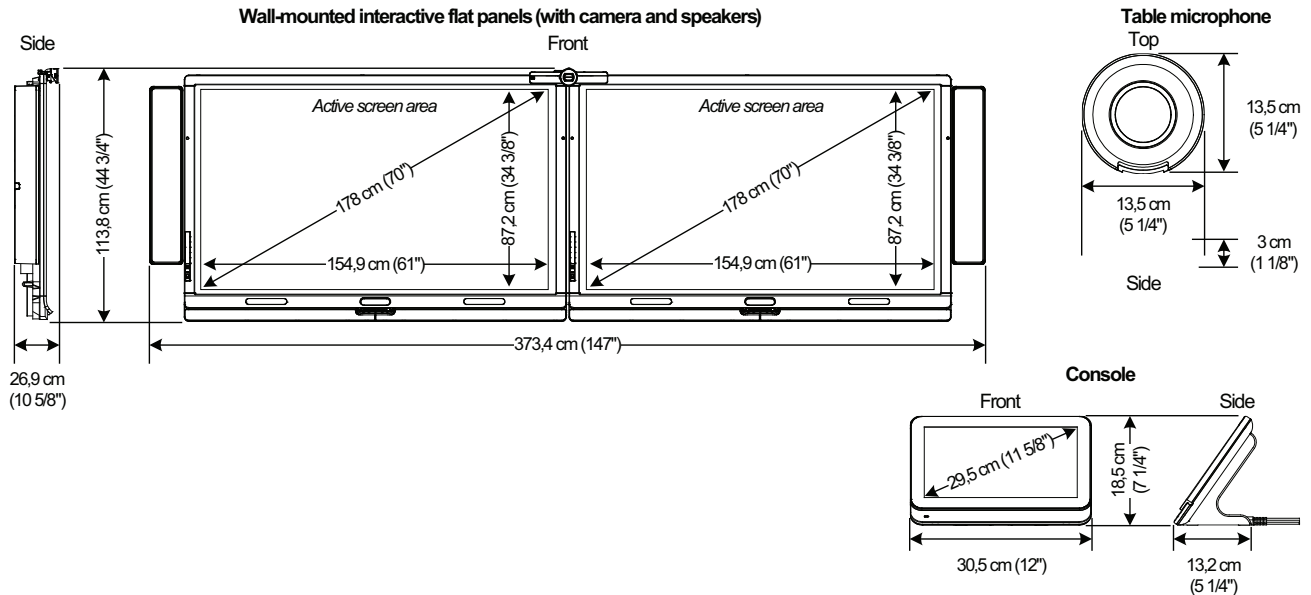

¹All dimensions ± 0.3cm (1/8"). All weights ± 0.9kg (2lb)

SPECIFICATIONS

SMART Room System for Microsoft Lync for large rooms – Model SRS-LYNC-L

	Weight	Dispatch weight	Dispatch dimensions
Interactive flat panel (×2)	93kg (205 lb)	114kg (251 lb)	196cm × 143cm × 39cm (77 1/8" × 56 1/4" × 15 3/8")
WM-SBID-501 wall mount (×2)	10.9kg 24lb	14kg (31 lb)	117cm x 32cm x 28.1cm (46" × 12 1/2" × 11")
Speakers	7kg (15 lb)	9.1 kg (20lb)	96cm x 39.5cm x 18.8cm (37 3/4" × 15 1/2" × 7 3/8")
System components	6.2kg (14 lb)	10.8kg (24lb)	49.5cm x 45.7cm x 57.2cm (19 1/2" × 18" × 22 1/2")
Total	221kg (487 lb)	294kg (648 lb)²	

Hardware

Included hardware

SBID 8070i-G4	SMART Board 8070i-G4 interactive flat panel (×2)
AM70-L	Lync appliance
XTM	I/O extension module
CP311	Console
CAM301	Camera
MIC500	Table microphone (×2)
MIX500	Audio processor
CSR500	Speakers
WM-SBID-501	Wall mount for installing an interactive flat panel on a wall (×2)

Included cables

For interactive flat panels	2.4m (8') IEC 60320 C13 to country-specific power (×2) HDMI USB
For console	6.3m (20' 8") HDMI, VGA and USB 2.4m (8') IEC 60320 C13 to country-specific power AC/DC converter
For camera	USB and power
For table microphones and audio processor	9m (30') interactive flat panel to table 4m (13') microphone to microphone
For laptop ³	9.3m (30' 6") harness (HDMI and VGA)
Recommended diameter for conduit	4.5cm (1 3/4")

²Including the pallet

³Laptop not included

Interactive flat panels

Touch technology	DViT® (Digital Vision Touch) technology
------------------	---

Screen size (diagonal)	178cm (70")
---------------------------	-------------

Aspect ratio	16:9
--------------	------

Optimal resolution	1920 × 1080 at 60 Hz
--------------------	----------------------

Horizontal frequency	54–69.75 kHz (analogue and digital)
----------------------	-------------------------------------

Vertical frequency	48–62 Hz
--------------------	----------

Contrast ratio (typical)	4000:1
--------------------------	--------

Brightness (typical)	180–250 cd/m ²
----------------------	---------------------------

Pixel pitch	0.807 mm
-------------	----------

Lync appliance

Processor	2.3 GHz Intel® Core™ i7 with HD 4000 graphics chipset
-----------	---

RAM	Dual-channel 8 GB DDR3
-----	------------------------

Console

Screen size (diagonal)	29.5cm (11 5/8")
---------------------------	------------------

Aspect ratio	16:9
--------------	------

Resolution	1366 × 768
------------	------------

Brightness	250 cd/m ²
------------	-----------------------

Camera

Features	Digital pan, tilt and zoom (DPTZ) Automatic white balance Automatic exposure and power line frequency detection Manual lens tilt adjustment Internal privacy shutter Video recording indicator
----------	---

Aspect ratio	16:9
--------------	------

Resolution (maximum)	1920 × 1080
-------------------------	-------------

Frame rate (typical)	30 frames per second (at ≥ 200 lx)
----------------------	------------------------------------

Field of view	109° (full) 98° (horizontal)
---------------	---------------------------------

Depth of field	1-10m (3'-33')
----------------	----------------

Signal-to-noise ratio (minimum)	33 dB at ≥ 50 lx 36 dB at ≥ 200 lx
------------------------------------	---------------------------------------

Dynamic range (minimum)	42 dB
----------------------------	-------

SPECIFICATIONS

SMART Room System for Microsoft Lync for large rooms – Model SRS-LYNC-L

Table microphones

Features	Mute button and indicator 4m (13') cable between microphones Daisy-chain up to five microphones
----------	---

Local speaker audio level	60–65 dBA measured at 0.5m (20")
---------------------------	----------------------------------

Speakers

Total harmonic distortion	< 1% average < 3% maximum 80–10 kHz
---------------------------	---

Frequency response	± 6 dB, 80–10 kHz
--------------------	-------------------

Nominal volume	76 dBSPL
----------------	----------

Audio

Echo cancellation	> 45 dB at nominal receive output level
-------------------	---

Software

Lync Room System software	See lync.microsoft.com
----------------------------------	--

Storage and operating requirements

Room system power (excluding console)

Power requirements	9.5A at 100V to 4A at 240V AC, 50 Hz to 60 Hz
--------------------	---

Power consumption at 25°C (77°F)	950 W
----------------------------------	-------

Console power

Normal power consumption	< 12 W (supplied using the 12 V AC/DC converter)
--------------------------	--

Standby power consumption	< 0.6 W
---------------------------	---------

Operating temperature	5–35°C (41–95°F)
------------------------------	------------------

Storage temperature	-40–60°C (-40–140°F)
----------------------------	----------------------

Humidity	85% relative humidity, non-condensing
-----------------	---------------------------------------

Certification and compliance

Regulatory certification⁴	UL (US and Canada), FCC, IC, C-Tick, NOM, CU, CB, VCCI, KC, CCC, PSB, BIS, PSE, KCC
---	---

⁴As applicable to the components

Environmental compliance

China	EIP
European Union	REACH, RoHS, WEEE, Battery and Packaging
US	Packaging and Conflict Minerals

Purchasing information

Order number

SRS-LYNC-L	SMART Room System forLync for large rooms
------------	---

Optional accessories

MIC500	Add-on microphone
WSK-DUAL	Wall stand kit for large rooms, including two wall stands for transferring some of the weight of the interactive flat panels to the floor and one cable track

Warranty

Two-year warranty	Interactive flat panels Camera Lync appliance I/O extension module Console
One-year warranty	Speakers Wall mounts
90-day return	Cables, pens, batteries and other items that can be purchased from smarttech.com/Support/PartsStore

smarttech.com/support
smarttech.com/contactsupport

© 2013 SMART Technologies ULC. All rights reserved. SMART Room System, SMART Board, DVIT, smarttech, the SMART logo and all SMART taglines are trade-marks or registered trade-marks of SMART Technologies ULC in the US and/or other countries. Microsoft, Lync and PowerPoint are either registered trade-marks or trade-marks of Microsoft Corporation in the US and/or other countries. All other third-party product and company names may be trade-marks of their respective owners. This product and/or use thereof covered by one or more of the following US patents. www.smarttech.com/patents. Contents are subject to change without notice. 11/2013.